



► Models LP3E, LP3M, LP3P, LP3S, and LP3T

StreamLine® Low Profile Strobe Light

Model LP3 is offered in five mounting configurations. The LP3S features a three-hole surface mount — ideal for control panels and other flat or flush surfaces. The LP3E features a standard A-19 medium Edison screw-in base. The LP3M features a 1/2-inch NPT male pipe mount and 18-inch wire leads. LP3P features an integrated 1/2-inch NPT pipe mount. The “T-mount” LP3T has a popular two-hole design for wall or flush mounting.

Models LP3M, LP3S, and LP3T include a surface gasket to complete the Type 4X installation. An optional dome guard is available for use with the LP3M, LP3S, and LP3T when installed flush with a panel. All LP3 units feature a threaded screw-on lens to allow for tool-free wiring and strobe tube replacement.

Like all StreamLine® products, the LP3 is designed with OEM applications in mind.



FEATURES

- Available in 12-48 Vdc, 120 Vac and 240 Vac; LP3E only available in 120 Vac
- Five mounting options: Edison (E), 1/2-inch NPT male pipe (M), Surface (S), T-Mount (T), integrated 1/2-inch NPT pipe (P)
- Five lens colors: Amber, Blue, Clear, Green, and Red
- Screw-on lens provides easy access
- Conformal coated PCBA
- Type 4X, IP66 enclosure
- Models LP3M, LP3P and LP3S, are IP69K compliant (excludes LP3E and LP3T)
- PLC and triac compatible
- CSA Certified
- UL and cUL Listed
- CE and UKCA certified

MODEL	VOLTAGE	OPERATING CURRENT	FLASH RATE / MINUTE	LIGHT OUTPUT	
				PEAK ¹	ECP ²
LP3*-012-048**	12-48 Vdc	0.44-0.10 A	80 (+/-15)	175,000 cd	51.5 cd
LP3*-120**	120 Vac	0.10 A	80 (+/-15)	175,000 cd	51.5 cd
LP3*-240**	240 Vac	0.07 A	80 (+/-15)	175,000 cd	51.5 cd


* Indicates Mounting Style: (E) Edison A-19 Screw-in Base, (M) Male Pipe Mount, (P) Pipe Mount, (S) Surface Mount, (T) T-Mount

** Indicates color: (A) Amber, (B) Blue, (C) Clear, (G) Green, or (R) Red

¹ Peak candela is the maximum light intensity generated by a flashing light during its light pulse

² ECP (Effective Candela) is the intensity that would appear to an observer if the light were burning steadily

StreamLine® Low Profile Strobe Lights (LP3E, LP3M, LP3P, LP3S, and LP3T)

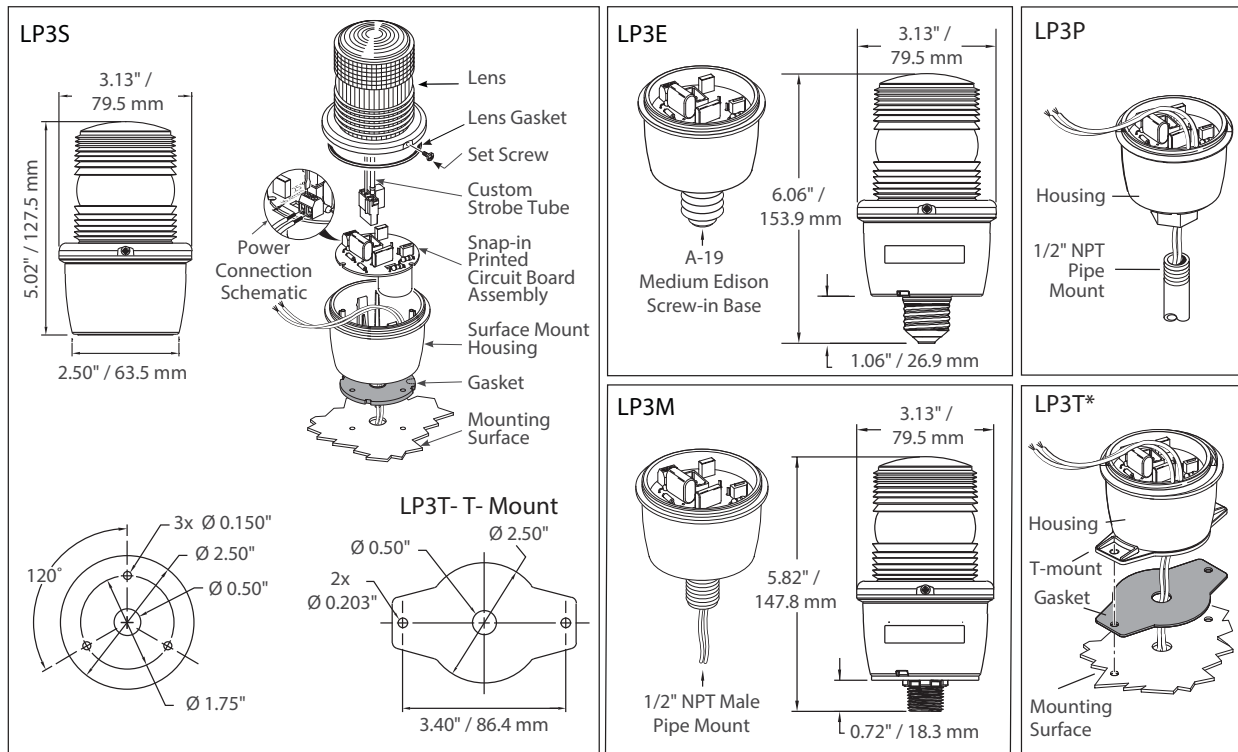

* LP3T-120 & 240 Vac shown, 24 Vdc wires protrude from side of base.

SPECIFICATIONS

Lamp Life:	4,000 Hours
Light Source:	Strobe tube
Operating Temperature:	-31° to 150°F (-35° to 66°C)
Net Weight:	7.3 oz (0.21 kg)
Shipping Weight:	8.5 oz (0.24 kg)
Height:	
LP3E	6.06 in (153.9 mm)
LP3M	5.82 in (147.8 mm)
LP3P	5.82 in (147.8 mm)
LP3S	5.02 in (127.5 mm)
LP3T	5.02 in (127.5 mm)
Diameter:	3.13 in (79.5 mm)

ACCESSORIES

Description	Part Number
Wire Dome Guard for LP3M, LP3S, and LP3T	LP3G




LP3G

REPLACEMENT PARTS

Description	Part Number
Lens, Amber	K8589063A
Lens, Blue	K8589063A-01
Lens, Clear	K8589063A-02
Lens, Green	K8589063A-03
Lens, Red	K8589063A-04
Flash Tube Assembly	K149130A

HOW TO ORDER

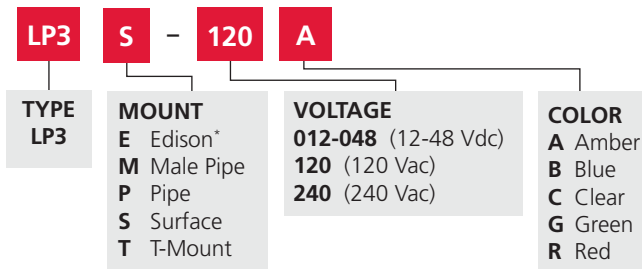

* LP3E only available in 120 Vac